


BVM ELEVATOR LINKS

BVM's Elevator and Work Over Links are forged from a single piece of high grade alloy steel. BVM Links are designed to improve handling and balancing of the elevator and are supplied in a matched set. All links are certified, magnetic particle inspected, and 1.5X load tested. 1000 ton & special lengths are also available.

LINK SPECIFICATIONS

BIG EYE PART NUMBER HAS "-BE" AT END

PART NO.	LENGTH	CAPACITY (TONS)	WT. PER SET
17536	36	150	215
17548	48	150	250
17560	60	150	280
17572	72	150	320
17584	84	150	360
17596	96	150	400
175108	108	150	440
175120	120	150	500
22560	60	250	480
22572	72	250	530
22584	84	250	580
22596	96	250	630
225108	108	250	680
225120	120	250	700
225132	132	250	780
225144	144	250	875
225168	168	250	900
275108	108	350	870
275120	120	350	935
275132	132	350	1000
275144	144	350	1095
275180	180	350	1255
275192	192	350	1320
275216	216	350	1450
275240	240	350	1580
350108	108	500	1450
350132	132	500	1670
350144	144	500	1780
350160	160	500	1930
350168	168	500	2000
350180	180	500	2120
350192	192	500	2200
350264	264	500	2280
475120	120	750	3430
475144	144	750	3830
475160	160	750	4230
475180	180	750	4560
475216	216	750	5170
475240	240	750	5570
475264	264	750	5970

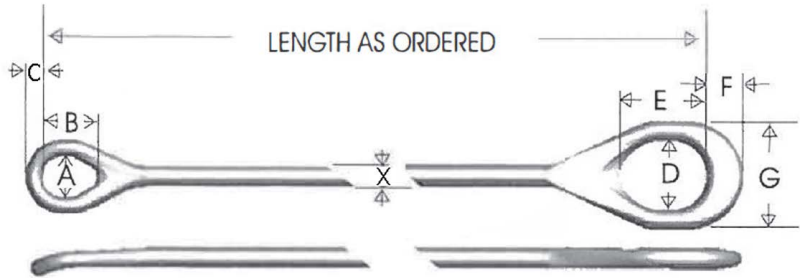

TYPE	RATING	X	A	B	C	D	E	F	G
ELEVATOR	250	2 7/8	5 1/2	8	2 1/4	9 1/2	12	5	15
ELEVATOR	350	3 1/2	5 1/2	8	2 3/4	9 1/2	12	5	15
ELEVATOR	500	4 3/4	6 1/2	10 1/8	3 1/2	9 1/2	12	6	17
ELEVATOR	750	6 1/8	10	14 1/2	7 1/2	10	14 1/2	7 1/2	23
WORK OVER	150	3	4	6	1 7/8	5	13 1/8	3 1/2	8 3/4

BVM CORPORATION

430 S. NAVAJO STREET, DENVER CO 80223
 PHONE: 303-975-1402; FAX: 303-975-0981
 www.bvmcorp.com; sales@bvmcorp.com